

# PANEL OR SURFACE AUDIBLE ALARM + STROBE OPTION



## MODEL TYPES ::

- SEP > Audible Alarm, DC
- SEE > Audible Alarm, AC
- SEPS > Audible Alarm with Strobe, DC

## FEATURES ::

- ‡ 26 adjustable tones with volume up to 110dB at 1 meter
- ‡ 2 tones from one alarm with NPN connection
- ‡ 2 base depths  
 SHORT BASE: 76mm tall IP54 panel mount  
 TALL BASE: 103 mm tall IP65 with PG16 entry
- ‡ Acoustical frequency range for the 26 tones is .4 to 3.0 KHz
- ‡ Temperature range is -10 C to 55 C
- ‡ White ABS plastic (red also available)
- ‡ IP54 with short base or IP65 with tall, surface-mount base
- ‡ CE approved (SEE must use tall base for CE approval)





## ORDERING INFORMATION ::


MODEL TYPE:: SEP, SEE, SEPS  
 VOLTAGE:: 024: 9-28 VDC 240: 110-240 VAC 50/60 Hz  
 COLOR (strobe on SEPS only):: red, amber, blue, green, clear  
 BASE:: 26: Short Base (panel mount) 76: Tall Base (surface mount)  
 EXAMPLE:: SEP-024-26 [panel buzzer, short base, DC]

MODEL	CURRENT-12V	CURRENT-24V
SEP	8mA	12mA
SEPS	110mA	68mA
SEE	35mA at 240VAC	

## DIMENSIONS

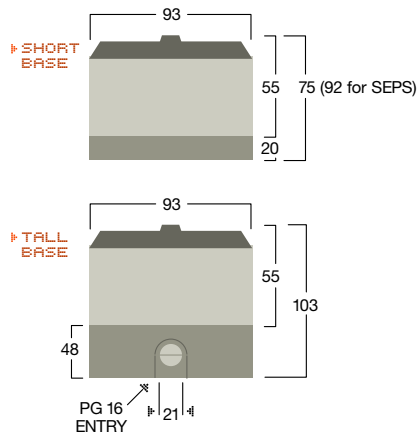

## WIRING CONNECTIONS

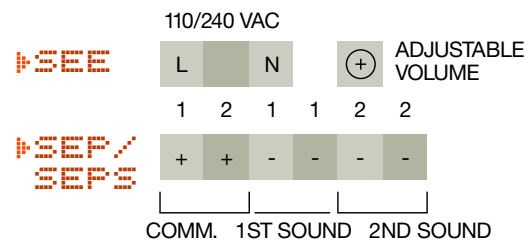

\*SECOND TONE AVAILABLE WITH NPN CONNECTION