





'Flashing' & 'Status' Beacons

DIMENSIONS mm

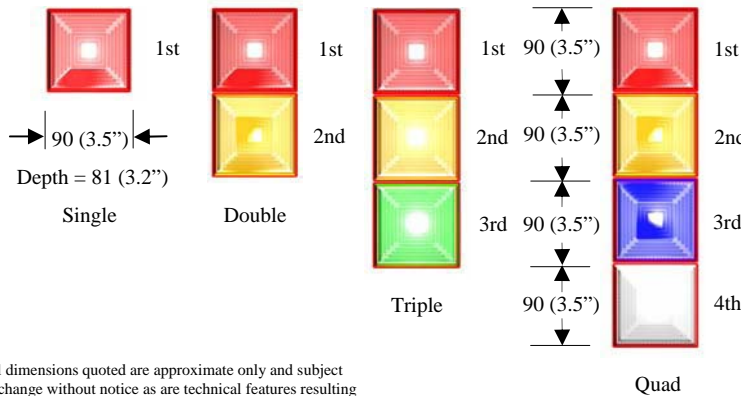

All dimensions quoted are approximate only and subject to change without notice as are technical features resulting from continual development and improvement.

CONFIGURATOR

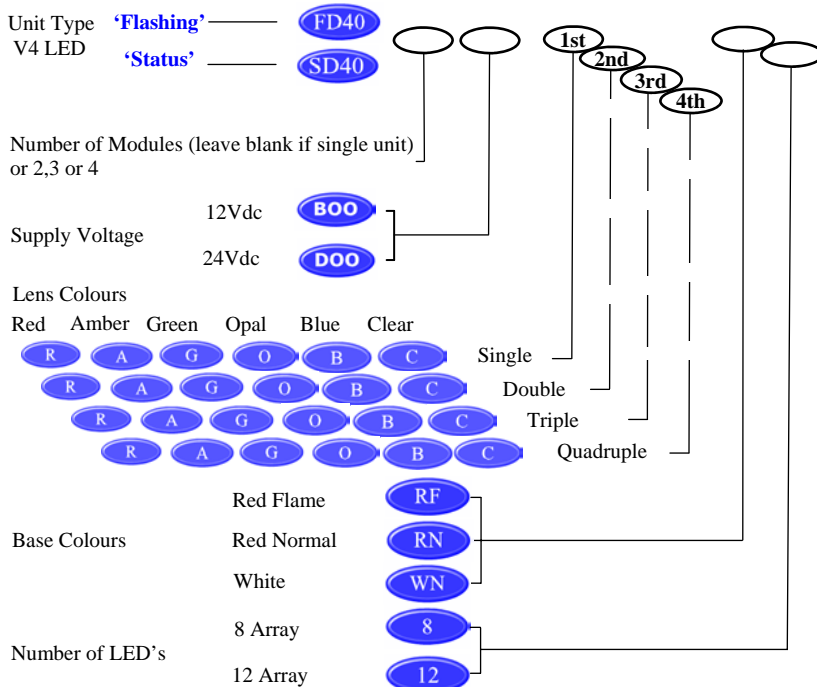

MAIN FEATURES

- Continuously rated
- High light intensity
- Long life LED design
- Reliable and simple to install
- Flush mounting base available
- Red / White flame retardant ABS plastic enclosure
- Up to 4 modules in any combination of lens colour ranging from Red, Amber, Green, Opal, Blue, Clear
- Each beacon should be wired independently.

TECHNICAL SPECIFICATION

- Operating voltage 12Vdc/24Vdc
- Operating temp range -25 to +40deg C
- Storage temp range -40 to +70deg C
- Relative humidity 90% @ 40deg C
- IP65 rated
- Weight: Single 0.15 Kg, Double 0.3 Kg, Triple 0.45 Kg, Quad 0.6 Kg

MOUNTING

All units are supplied separate from the back box for ease of installation. The back box should be mounted to a reasonably flat surface or bulkhead. A gasket is supplied, should the surface be uneven, or if the unit is to be used in wet conditions. The installation is completed by fitting the beacon onto the back box by means of the supplied screws.

LINE MONITORING

Monitoring via reverse polarity
End of line resistor minimum 3K3 ohms 0.5 watts wire-wound or metal film type

ORDERING INFORMATION

Base Colours:
RF = Red flame
RN = Red normal
WN = White

