

GPH3/GP4

UL 110 dB Panel Mount or Enclosed Audible Alarm



MODEL TYPES

- GPH3 > Enclosed, High Output Electronic Audible Alarm
- GPH4 > Panel Mount, High Output Electronic Audible Alarm

FEATURES


- > Electronic, Industrial Audible Alarm
- > Reliable & Low Current Alternative to Mechanical Solenoid Buzzer
- > 110dB(A) @ 1m +/- 3dB, [101dB(A) @ 10ft/3m]
- > Rated for Continuous Use
- > Automatic synchronization on multi-sounder system
- > 10-30VDC, 115 VAC & 230 VAC models
- > Stainless Steel Mounting Hardware
- > Duplicate Cable Terminations (in & out for daisy-chain installation)
- > Tropicalisation available on request
- > UL & cULS, CE, EAC approved
- > 3 Tones
- > GPH3: IP66 (UL Type 4/4X/13)
- > GPH4: IP54 (UL Type 13/3R)
- > Custom Tone and Frequencies Available on Request

ORDERING INFORMATION

Part Number	Versions
GPH3SEDC024G	> 10-30V dc/ac
GPH3SEAC230G	> 40-260V dc/ac
GPH4FEDC024G	> 10-30V dc/ac
GPH4FEAC230G	> 40/260V dc/ac


VERSION	VOLTAGE	CURRENT
10-30V dc/ac	12V dc	52mA
10-30V dc/ac	24V dc	105A
40-260V dc/ac	48V dc	42mA
10-30V dc/ac	12V ac 50/60Hz	115mA
10-30V dc/ac	24V ac 50Hz	215mA
40-260V dc/ac	48V ac 50/60Hz	68mA
40-260V dc/ac	115V dc	16mA
40-260V dc/ac	230V dc	8mA
40-260V dc/ac	115V ac 50/60Hz	36mA
40-260V dc/ac	230V ac 50/60Hz	18mA

DIMENSIONS - GPH3

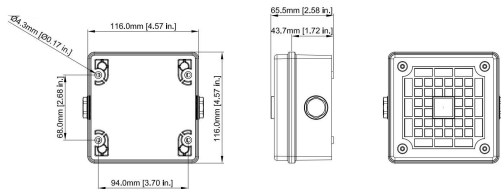

ESD PART NO. DESCRIPTION DATA REFERENCE
 GPH- GPH ALARM HOORN BUZZER 22-102
 GPH- GPH ALARM HOORN BUZZER 22-103
 WHERE APPLICABLE: ALL VERSIONS ARE COVERED BY THIS OUTLINE DRAWING.

DIMENSIONS - GPH4



ESD PART NO. DESCRIPTION DATA REFERENCE
 GPH- GPH ALARM HOORN BUZZER 22-102
 GPH- GPH ALARM HOORN BUZZER 22-103
 WHERE APPLICABLE: ALL VERSIONS ARE COVERED BY THIS OUTLINE DRAWING.