

H3C-R

ANALOGUE TIMER

SIGNAWORKS
www.signaworks.com



MODEL TYPES

H3C-R > Multi-Function Analogue Timer

FEATURES

- > AC/DC 12V~240V
- > 8 field-selectable output modes for various applications
- > 14 field-selectable time ranges: 1.2s / 3s / 12s / 30s / 1.2m / 3m / 12m / 30m / 1.2h / 3h / 12h / 30h / 120h / 300h
- > 68mm short body design
- > UL listed, C-UL recognized and CE certified
- > Ambient operating temperature: -10 °C ~ +50°C
- > Rated frequency: 50 / 60Hz

ACCESSORIES AND OPTIONS

- > Includes 2C output contacts, instantaneous output contact, flicker and interval modes
- > Adapter Y-57 for different flush mount

VOLTAGE

24 ~ 240 VAC/DC

POWER CONSUMPTION


3VA

AMBIENT OPERATING TEMPERATURE

-10 ~ +50 °C

DIMENSIONS

N type(Surface Mounting): Using P2CF-08 , PF085A Socket or PF113A Socket(for H3C-R11 use only)

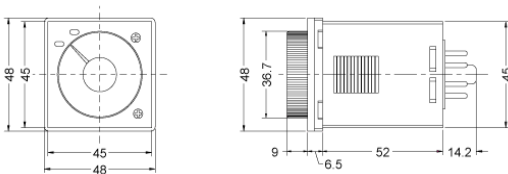

Y type(Flush Mounting): Using Y50 Frame & US-08 Socket , P3G-08 Socket

