

SEP/SEE/SEPS

Audible Alarms and Strobe

 **SIGNAWORKS**
www.signaworks.com



MODEL TYPES

- SEP > Audible Alarm, 9-28VDC
- SEE > AC Base for SEP and SEPS
- SEPS > Audible Alarm with Strobe, DC

FEATURES


- > 26 adjustable tones with volume up to 110 dB at 1 meter
- > 2 tones from one alarm with NPN connection
- > 2 base depth: SHORT BASE: 76mm tall IP54 panel mount TALL BASE: 103 mm tall IP65 with PG16 entry
- > Acoustical frequency range for the 26 tones is .4 to 3.0 KHz
- > Temperature range is -10 C to 55 C
- > White ABS plastic (red also available)
- > IP54 with short base or IP65 with tall, surface-mount base
- > CE approved (SEE must use tall base for CE approval)
- > Separate Audible & Strobe for SEPS inputs
- > Red or Amber lens standard - Blue, Green and Clear available on request

ORDERING INFORMATION


- Model Type > SEP, SEE, SEPS6
- Voltage > 024: 9-28 VDC 240: 110-240 VAC 50/60 Hz
- Color > Red, Amber
- Base > 26: Short Base (panel mount) 76: Tall Base (surface mount)
- Ordering Example > Standard Strobe is Red, add "-A" for Amber
- > SEP-024-26 (18-28VDC Audible)
- > SEPS-024-26-A (18-28VDC Audible and Amber Strobe)
- > SEPS-012-26 (9-15VDC Audible and Strobe)
- > SEE-110/240-BASE (100-240VAC Base for SEP & SEPS-024)

MODEL	CURRENT- 12V	CURRENT-24V
SEP	8mA	12mA
SEPS	110mA	68mA
SEE	350mA at 240VAC	

DIMENSIONS

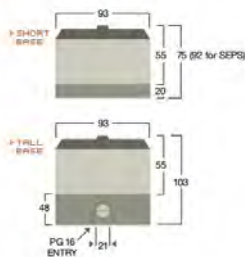

WIRING CONNECTIONS

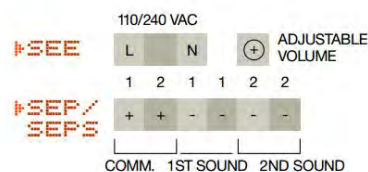

*SECOND TONE AVAILABLE WITH NPN CONNECTION