


WIRELESS FLATSCREEN

MODEL TYPES

- AZTL > Wireless Display Tower Light
- AZUSB > Wireless Display USB Receiver
- AZTR > Wireless Display Repeater
- AZDTL > Wireless Display Downtime Monitor
- AZCTL > Wireless Display Cycle Timer


FEATURES

- > Realtime display of tower light status customer supplied PC with flatscreen
- > Customizable display
- > Receiver has 60 meter range with 700 meters possible with repeater
- > Each transmitter in the system also acts as a repeater

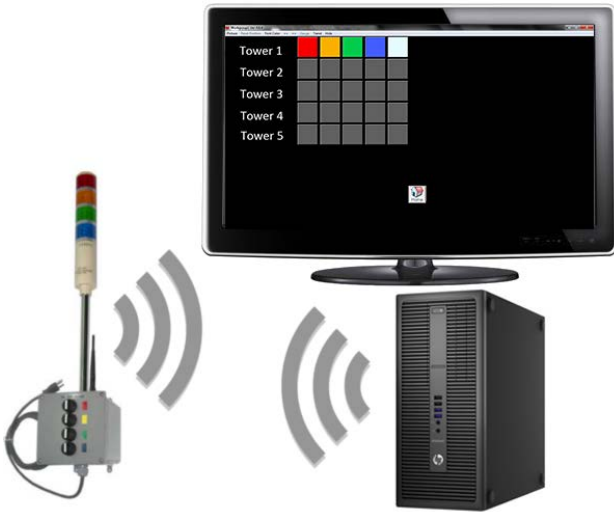

ACCESORIES AND OPTIONS

- > Data Logging of inputs and outputs
- > Email notification on status change
- > Basic software up to 64 I/O and 1 email address
- > Advanced software with 1024 I/O and 10 email addresses
- > Audible alerts can be assigned to inputs
- > Ethernet Data Logging available with RJ45 connector
- > Wireless Inputs or Outputs available for remote signals or data logging

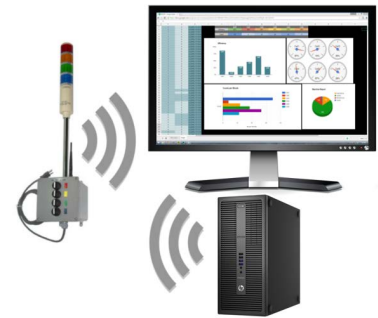

ORDERING INFORMATION

Model Type	AZUSB, AZTR, AZTL, AZTLF, AZTLB, AZRL, AZRL, AZRS, AZRLB, AZRSB, AZRD, AZRDB, AZVSS, AZSSV, AZTVS, AZDTL, AZCTL
Voltage	24VDC, 110VAC (standard)
Number of Lights	1, 2, 3, 4, 5
Colors	Red, Amber, Green, Blue, Clear
Ordering Example	AZDTL-110-4 (4 Light LED Downtime Monitor, Wireless Data Logging, 110 VAC Power Cord)

BINGO BOARD



TOWER LIGHT

