

# KACON

## 22mm (7/8") ALARM BUZZER

### FEATURES

- Designed for through-the-door use
- Select *Intermittent* or *Continuous* sound, with jumper
- Small size with loud sound
- Low current consumption
- Universal voltage

### SPECIFICATIONS

	AC TYPE	DC TYPE
Operating Temperature	-25°C to 70°C	
Operating Humidity	45 – 85% RH	
Voltage Range	AC90 – 240V 50/60Hz	AC/DC 12–24V
Current Consumption	70mA @ 240V	60mA @ 24V
Noise Level: -0.1m -1.0m	Min. 80dB Min. 60dB	
Isolation Voltage	AC, DC 60V from base to connection	
Dielectric Strength	AC, 1800V for 1 minute	
Insulation Resistance	DC 100V 50M ohms	
Life	500 hours of continuous use	

### ORDERING INFORMATION

<b>K</b>	<b>B</b>	<b>- 2</b>	<b>B</b>	<b>AF</b>	<b>S</b>
Company	Item	Mounting Hole Size	Guard Color	Voltage	Terminal Type
K: KACON	B: Buzzer	2: 22mm	B: Black G: Gray Y: Yellow R: Red	AF: 90 – 240VAC AD: 12 – 24VAC/DC	S: Screw

## 30mm (7/8") ALARM BUZZER

### FEATURES

- Designed for through-the-door use
- Small size with loud sound — 87db at 1 meter
- Gray plastic body with chrome colored bezel
- Screw terminal connection


### ORDERING INFORMATION

**S Z 3 C - XX**



### VOLTAGE

- 110VAC
- 12VDC
- 24VDC

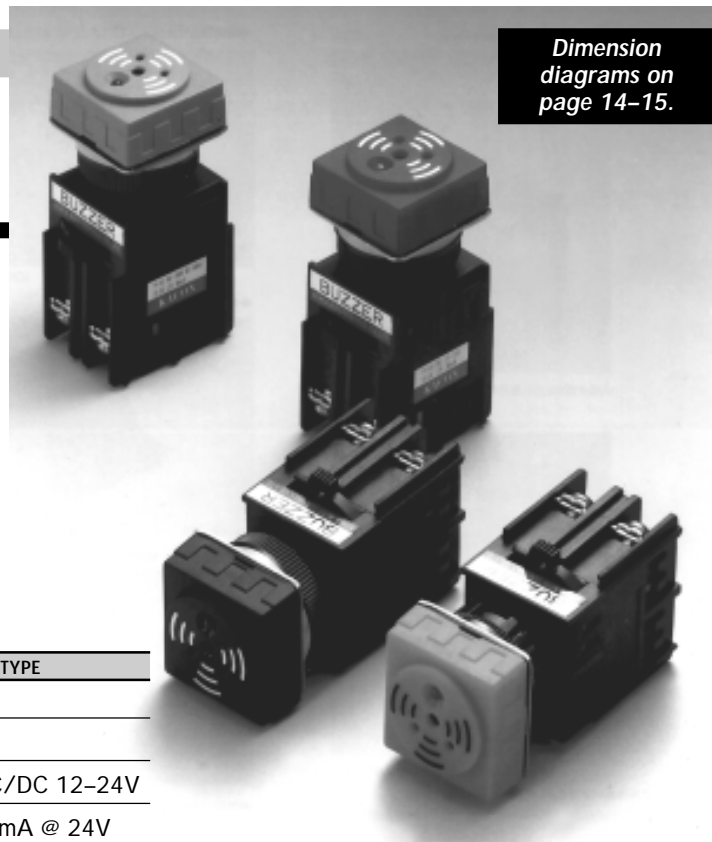

Dimension diagrams on page 14–15.